

Class 180 Polyester Overcoated with Polyamide Round Aluminum Magnet Wire

Table1 Specifications

Insulation materials	Polyester Overcoated with Polyamide; Polyester (Amide) Overcoated with Polyamide; Polyester (Imide) Overcoated with Polyamide
Dimensions	Single 14-30 AWG in accordance with 0.0112mm-0.0666mm Heavy 10-24 AWG in accordance with 0.0227mm-0.1064mm

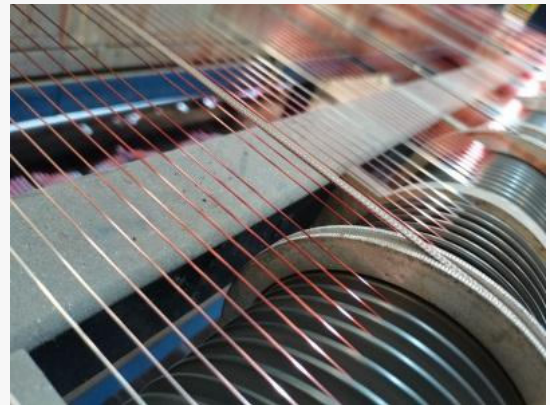


Table 2 Properties

Adherence and flexibility	No cracks visible in the film coating
Elongation	Not less than the value in 12-15
Heat shock	No cracks visible in the film coating after conditioning at 200°C
Dielectric breakdown	14-23.5 AWG: not less than the value in Single 2740v-3520v and Heavy 4930v-6330v 24-30 AWG: not less than the value in Single 2380v-2710v and Heavy 4220v-4870v
Continuity	Max number of discontinuities in accordance with Single 500-750 and Heavy 1000-1500

lp-industry

WhatsApp 商业帐号



郑州蓝普实业有限公司

Zhengzhou LP Industry CO., LTD.

Phone: 0086-19337889070

Web: <https://lpwindingwire.com>

Email: office@cnlpzz.com

Add: NO. 86 Jingsan Road, Jinshui District, Zhengzhou, China